


Backlash-free Servo-insert Coupling Type DK/GS

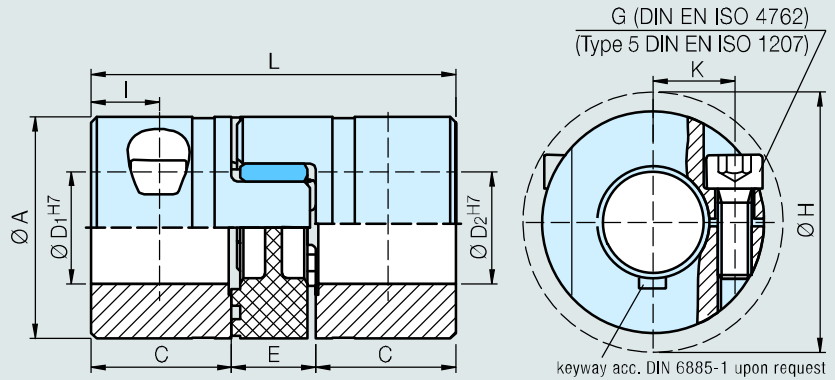

Technical data Type DK/GS

| Type | | | 5 | 7 | 9 | 14 | 19 |
|-------------------------------|--------------------------------------|------------------|------------------|-------|-------|-------|-------|
| Nominal torque | (Nm) | TKN (92ShA) | 0,5 | 1,2 | 3,0 | 7,5 | 10 |
| Moment of inertia of coupling | (10 ⁻⁶ kgm ²) | J ¹⁾ | 0,034 | 0,196 | 1,08 | 5,7 | 36 |
| Tightening torque of screws | (Nm) | MA | 0,25 | 0,35 | 0,75 | 5 | 10 |
| Weight per hub | (app. g) | m | 0,9 | 2,6 | 7,3 | 18 | 70 |
| Max. speed | (rpm) | n _{max} | 38000 | 27000 | 19000 | 13000 | 10000 |
| Standard shore hardness | | | 92 SH A (yellow) | | | | |

Dimensions (mm) Type DK/GS

| Type | | | 5 | 7 | 9 | 14 | 19 |
|---|--|-------------|-----------------|------|------|------|-------|
| L | | | 15 | 22 | 30 | 35 | 66 |
| A | | | 10 | 14 | 20 | 30 | 40 |
| C | | | 5 | 7 | 10 | 11 | 25 |
| Ø D ₁ H7 / Ø D ₂ H7 | | min. - max. | 2-4 | 3-7 | 4-11 | 9-14 | 10-20 |
| K | | | 3,2 | 5 | 7,3 | 10,5 | 15 |
| E | | | 5 | 8 | 10 | 13 | 16 |
| I | | | 2,5 | 3,5 | 5 | 5 | 6 |
| G (DIN EN ISO 4762) | | | M1,6 | M2 | M2,5 | M4 | M5 |
| H (clearance diameter) | | | 11,5 | 16,5 | 23,5 | 34 | 45 |
| Hub material | | | aluminium alloy | | | | |

Bore range D1/D2 and corresponding transmissible torque values (Nm) of the coupling

| Type | Ø 2 | Ø 3 | Ø 4 | Ø 5 | Ø 6 | Ø 7 | Ø 8 | Ø 9 | Ø 10 | Ø 11 | Ø 12 | Ø 13 | Ø 14 | Ø 15 | Ø 16 | Ø 17 | Ø 18 | Ø 20 |
|------|-----|-----|-----|------|-----|-----|-----|-----|------|------|------|------|------|------|------|------|------|------|
| 5 | 0,1 | 0,4 | 0,5 | 0,5 | | | | | | | | | | | | | | |
| 7 | | 0,4 | 0,9 | 0,95 | 1 | 1,1 | | | | | | | | | | | | |
| 9 | | | 1 | 2 | 2,3 | 2,4 | 2,5 | 2,6 | 2,7 | 2,8 | | | | | | | | |
| 14 | | | | | | | | 7,5 | 7,5 | 7,5 | 7,5 | 7,5 | 7,5 | 7,5 | 7,5 | | | |
| 19 | | | | | | | | | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 |

¹⁾ Moment of inertia and weight (mass) are calculated with reference to the largest bore size.