
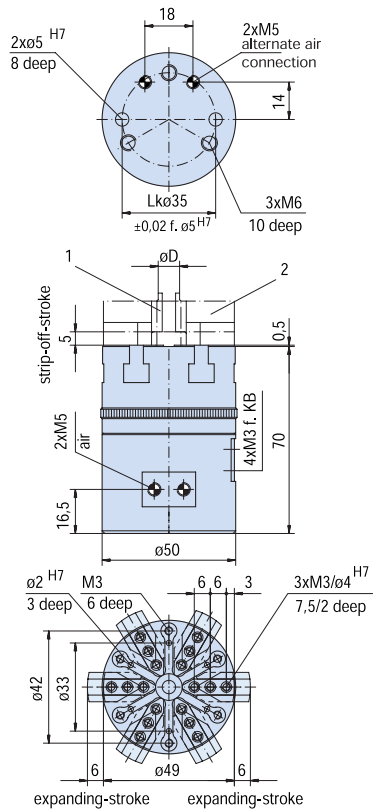


Parallel gripper		Three-jaw gripper		Angle gripper		Internal-hole gripper	Other grippers			Electric gripper		
SCH20	SCH23	ST36	ST40	ZK22	ZK33	<b>GS65</b>	RGO-30	RG10-60	SPG30-95	GF40	GF41	HM

## 6-point gripper for O-ring assembly


Advantages, benefits, comparisons and tips!  
Stacks of information all about this product are  
on page 171.

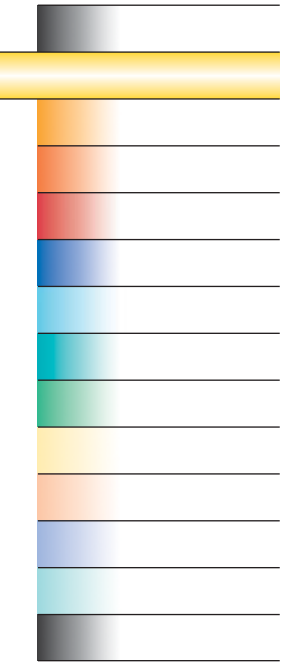

Order no.:				
<b>GS65</b>				
Drive:				
pneum.				
Opening stroke (adjustable for each jaw) [mm]:				
3-6				
Stripping stroke [mm]:				
5				
Gripping force in opening [N]:				
300				
Self-locking via:				
DSV1/8				
Closing time/opening time [s]:				
0,05				
Repeatability ± [mm]:				
0,1				
Min./max. operating pressure [bar]:				
4/8				
Air volume per cycle [cm <sup>3</sup> ]:				
7				
Min./max. operating temperature [°C]:				
5/80				
Temp. resistant version up to 150° C [add to part number]:				
T1				
Piston diameter [mm]:				
25				
Weight [kg]:				
0,55				


All data measured at 6 bar.

### Ejector Jaws Order no.: UB65-3




Ejector jaws  
(screws are included in the  
scope of delivery)  
order-no. UB 65-3

### Blank Jaws Order no.: UB65-2



Non machined jaws  
for O-ring seal ø20-60 mm

### Opening/Expanding Jaws Order no.: UB65-1 (Aluminum) Order no.: UB65-4 (Steel)



Jaws  
for O-ring seal ø4-20 mm