

BAUGRÖSSE Ø 62

TAILLE Ø 62

SIZE Ø 62

Rollenträger (Ausführung rechts)




Patins à galets (Exécution droite)

Rollers support (Right hand version)

2-Komponentenlackierung RAL 9004 schwarz

Peinture en 2 composants RAL 9004 noir

2 coats of semi gloss paint RAL 9004 black

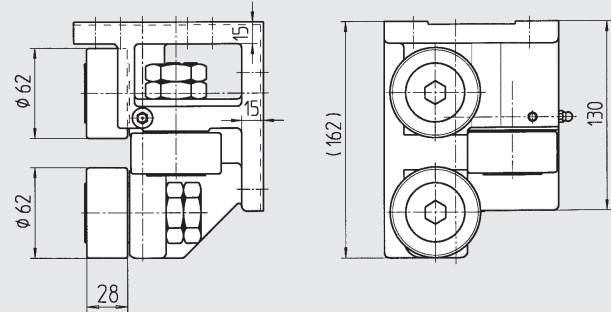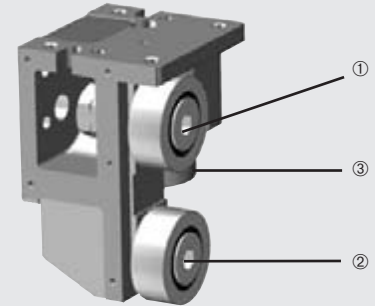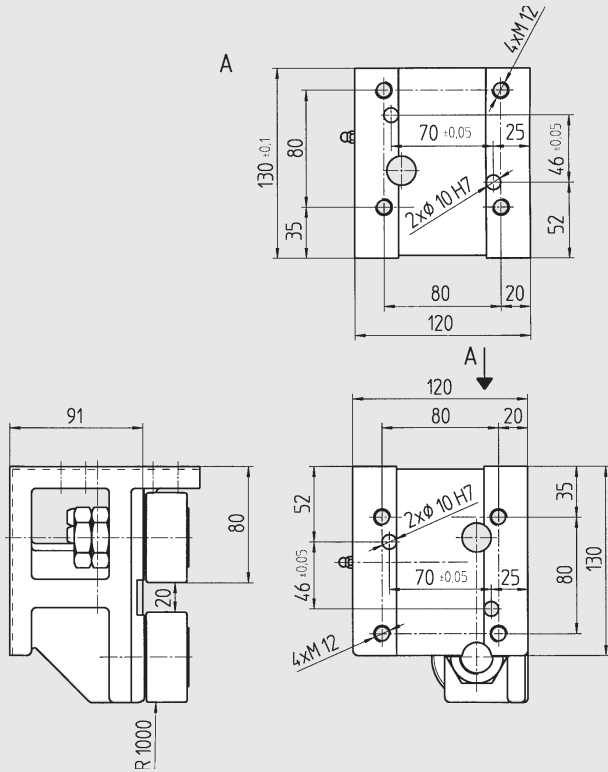

Type	Part No.	①	②	③	Mat.	m (kg)
RB 62.1R	903 560	BR	ER	ER	GGG40	7.0
RB 62.2R	903 561	BR	ER	BR	GGG40	7.0
RB 62.3R	903 562	ER	BR	ER	GGG40	7.0

Tragfähigkeit / Capacité de charge / Load carrying capacity

C _{0w} (N)	C _w ^① (N)	C _w ^② (N)	n _{max} (min ⁻¹)
39 500	21 400	5 400	2 200
39 500	21 400	5 400	2 200
39 500	21 400	5 400	2 200

Weg, Chemin parcouru, Distance: ① 10⁶m ② 10⁸m

Stützrollen

Galets

Stud roller

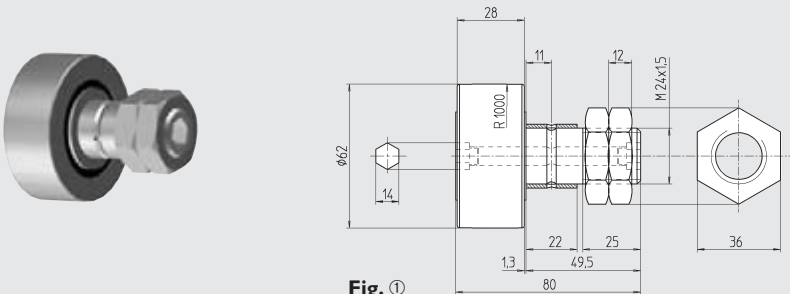


Fig. ①

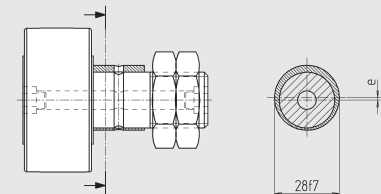




Fig. ②

Type	Part No.	Fig.	e (mm)	Mat.	m (kg)	MA (Nm)
BR 62	903 563	①	—	I00Cr6 1.3505	0.82	220
ER 62	903 564	②	I	I00Cr6 1.3505	0.82	220

MA (Nm):
Anziehmoment der Mutter

MA (Nm):
Couple de serrage de l'écrou

MA (Nm):
Nut tightening torque

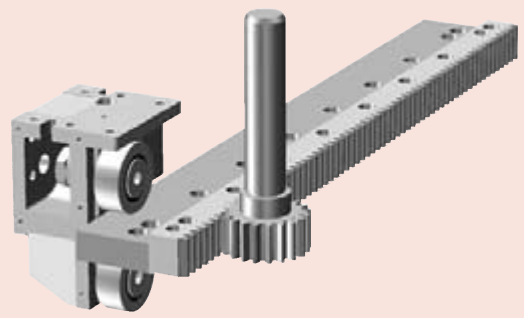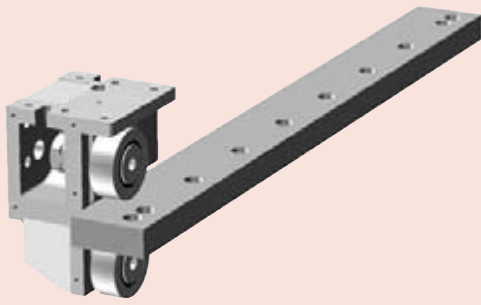

Rollenträger (Ausführung links)







Patins à galets (Exécution gauche)

Rollers support (Left hand version)

2-Komponentenlackierung RAL 9004 schwarz

Peinture en 2 composants RAL 9004 noir

2 coats of semi gloss paint RAL 9004 black

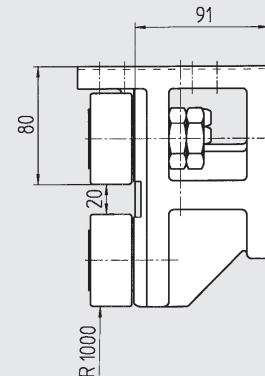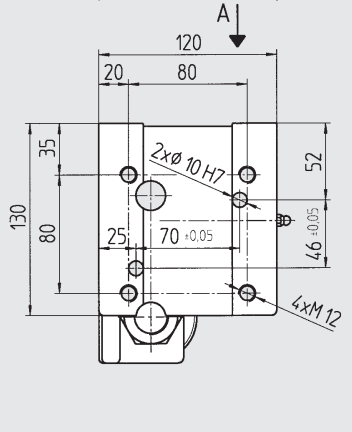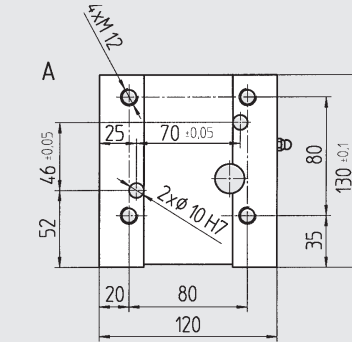




Type	Part No.				Mat.	m (kg)	Tragfähigkeit / Capacité de charge / Load carrying capacity			
		①	②	③			C _w (N)	C _w ^① (N)	C _w ^② (N)	n _{max} (min ⁻¹)
RB 62.1L	903 565	BR	ER	ER	GGG40	7.0	39 500	21 400	5 400	2 200
RB 62.2L	903 566	BR	ER	BR	GGG40	7.0	39 500	21 400	5 400	2 200
RB 62.3L	903 567	ER	BR	ER	GGG40	7.0	39 500	21 400	5 400	2 200

Weg, Chemin parcouru, Distance: ① 10⁶m ② 10⁸m

Abstreifer-Schmiereinheit

Racleur graisseur

Wiper and lubrication unit



Type	Part No.	m (kg)
RA 62 R	903 580	0.3
RA 62 L	903 581	0.3




ø62

BAUGRÖSSE Ø 62

TAILLE Ø 62

SIZE Ø 62






Konstruktionsabmasse
Cotes de montage
Mounting dimensions

Laufschiene

Rail de roulement

Guideway flat rail

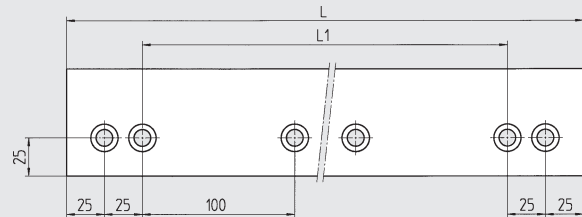

Type	Part No.	L	L ₁	Mat.		m (kg)
S 2070	903 538	2 000	1 900	58CrMoV4	1.7792	21.0
	903 539	1 200	1 100	58CrMoV4	1.7792	12.6
	903 540	800	700	58CrMoV4	1.7792	8.4






DIN 912 8.8 M_A
M10x25 48 Nm

Laufschiene

Rail de roulement

Guideway flat rail

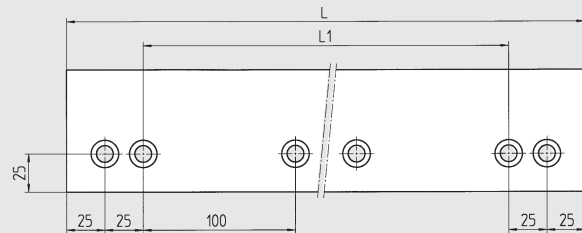

Type	Part No.	L	L ₁	Mat.		m (kg)
S 2080	903 541	2 000	1 900	58CrMoV4	1.7792	22.9
	903 542	1 200	1 100	58CrMoV4	1.7792	13.7
	903 543	800	700	58CrMoV4	1.7792	9.2



DIN 912 8.8 M_A
M10x25 48 Nm

