


Center in
shafts M5x12

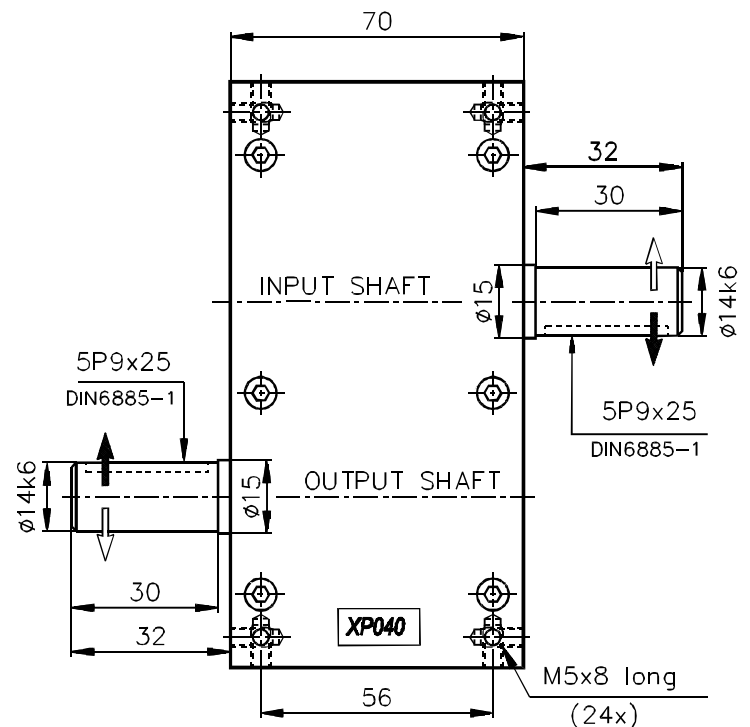

General tolerances
as per ISO 2768-m

Standard Indexer						
Number of stops n	Index angle α [°] from - to	Law of motion	Output torque at indexes/min [Nm]			Followers at pitch radius [mm]
			50	100	200	
1	300	mS 50	19	16	14	14
	330	mS 30	19	16	13	14
2	150	mS 50	22	18	15	14
	180-210	mS 30	22	18	15	14
	240-300	mS 0	20	16	14	14
3	120	mS 30	26	25	21	14
	150	mS 0	26	24	20	14
	180-300	mS 0	24	20	16	14
4	90	mS 0	22	22	20	14
	120-180	mS 0	21	20	17	14
	210-300	mS 0	20	19	16	14
5	120-180	mS 0	25	25	23	18
	210-300	mS 0	24	24	20	18
6*	150	mS 0	25	25	23	14
	180	mS 0	25	25	22	14
	210-300	mS 0	24	23	19	14
8*	120	mS 0	21	21	21	14
	150-180	mS 0	20	20	20	14
	210-300	mS 0	20	20	18	14
10*	150-300	mS 0	25	25	24	18
	210-300	mS 0	23	23	23	18

- Standard followers - $\varnothing 12$ mm.
- Housing made out of aluminium, weight approx. 2 kg.
- Internal moment of inertia $0,0001 \text{ kgm}^2$.
- Torque during dwell approx. 20 % higher than permissible torque at 50 indexes/min.
- Keyways on input and output shafts positioned in the middle of a dwell.
- Keyways to DIN 6885/1.
- Reversibility of rotation possible.
- Long life lubrication.
- * Indexer with 6, 8 or 10 stops requires 2 revolutions per input shaft rotation.
- Drawings with detailed dimensions available on CAD (DXF, DWG).
- A full range of reducer, clutch and brake options, as well as output overloads, is available.
- A wide range of further number of stops, index angles, and motion laws including oscillating movements is available.
- All rights reserved for technical changes.