


Center in
shafts M5x12

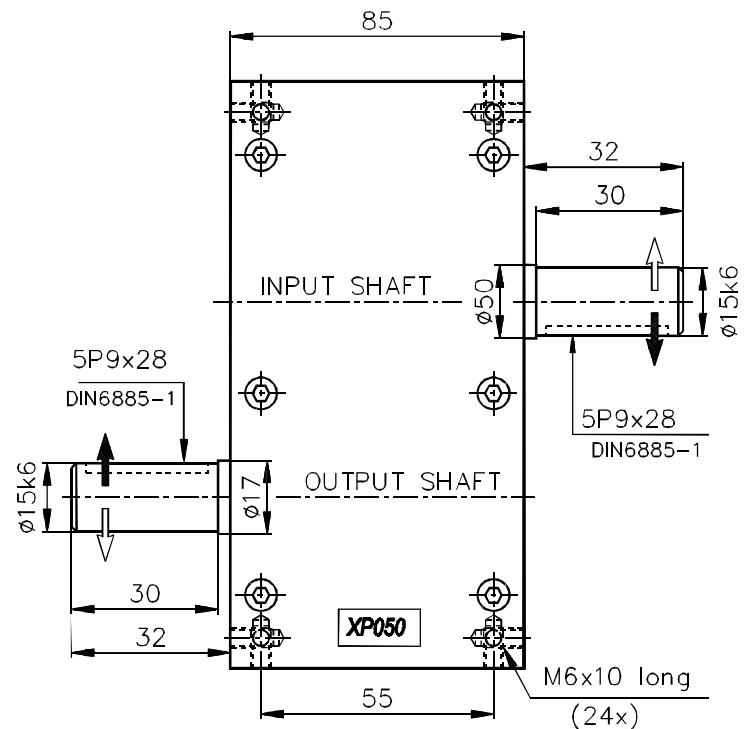

General tolerances
as per ISO 2768-m

Standard Indexer						
Number of stops n	Index angle α [°] from - to	Law of motion	Output torque at indexes/min [Nm]			Followers at pitch radius [mm]
			50	100	200	
1	300	mS 50	37	30	24	18
	330	mS 30	37	30	24	18
2	160	mS 50	38	35	28	18
	180-210	mS 30	38	33	26	18
	240-300	mS 0	46	37	30	20
3	120	mS 30	45	45	39	18
	150	mS 0	53	53	45	20
	180-300	mS 0	50	45	37	20
4	105	mS 0	39	39	38	18
	120-180	mS 0	43	43	39	20
	210-300	mS 0	41	41	34	20
5	120-180	mS 0	42	42	41	22
	210-300	mS 0	40	40	36	22
6*	180	mS 0	51	51	51	20
	210-300	mS 0	49	49	44	20
8*	150-180	mS 0	42	42	42	20
	210-300	mS 0	40	40	40	20
10*	150-180	mS 0	40	40	40	22
	210-300	mS 0	39	39	39	22

- Standard followers - \varnothing 16 mm.
- Housing made out of aluminium, weight approx. 3 kg.
- Internal moment of inertia 0,0006 kgm².
- Torque during dwell approx. 20 % higher than permissible torque at 50 indexes/min.
- Keyways on input and output shafts positioned in the middle of a dwell.
- Keyways to DIN 6885/1.
- Reversibility of rotation possible.
- Long life lubrication.
- * Indexer with 6, 8 or 10 stops requires 2 revolutions per input shaft rotation.
- Drawings with detailed dimensions available on CAD (DXF, DWG).
- A full range of reducer, clutch and brake options, as well as output overloads, is available.
- A wide range of further number of stops, index angles, and motion laws including oscillating movements is available.
- All rights reserved for technical changes.