


Center in shafts M6x16

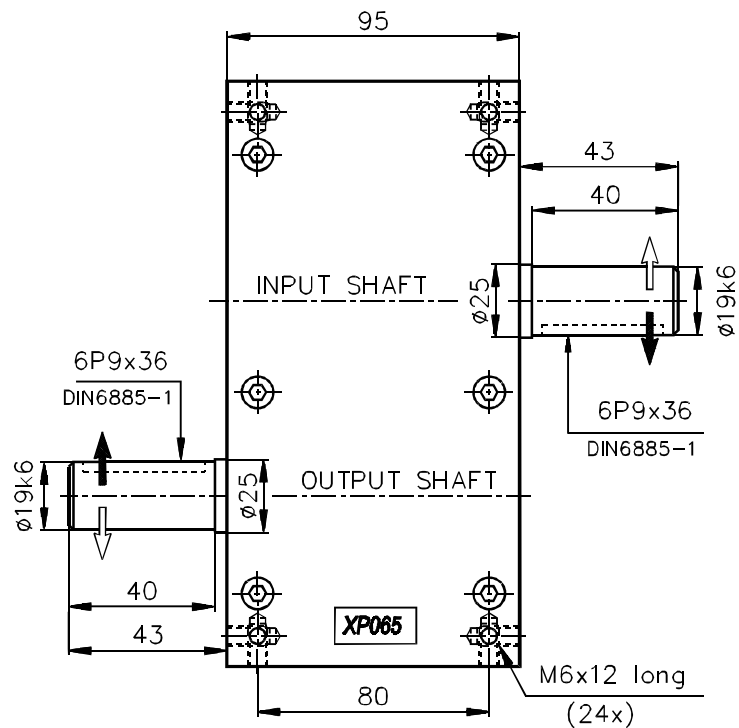

General tolerances as per ISO 2768-m

Standard Indexer						
Number of stops n	Index angle $\alpha$ [°] from - to	Law of motion	Output torque at indexes/min [Nm]			Followers at pitch radius [mm]
			50	100	200	
1	300	mS 50	48	39	31	25
	330	mS 30	42	34	27	23
2	150	mS 50	49	41	32	23
	180-210	mS 30	54	44	35	25
	240-300	mS 0	51	41	33	25
3	120	mS 30	57	55	44	23
	150	mS 0	66	62	50	25
	180-300	mS 0	62	50	41	25
4	90	mS 0	51	50	45	23
	120-180	mS 0	52	52	43	25
	210-300	mS 0	50	45	37	25
5	120-180	mS 0	55	55	51	29
	210-300	mS 0	53	53	43	29
6*	150	mS 0	57	57	53	23
	180	mS 0	63	63	57	25
	210-300	mS 0	61	61	49	25
8*	120	mS 0	47	47	47	23
	150-180	mS 0	51	51	51	25
	210-300	mS 0	49	49	44	25
10*	150-180	mS 0	54	54	54	29
	210-300	mS 0	51	51	51	29

- Standard followers - Ø 16 mm.
- Housing made out of aluminium, weight approx. 8 kg.
- Internal moment of inertia 0,0007 kgm<sup>2</sup>.
- Torque during dwell approx. 20 % higher than permissible torque at 50 indexes/min.
- Keyways on input and output shafts positioned in the middle of a dwell.
- Keyways to DIN 6885/1.
- Reversibility of rotation possible.
- Long life lubrication.
- \* Indexer with 6, 8 or 10 stops requires 2 revolutions per input shaft rotation.
- Drawings with detailed dimensions available on CAD (DXF, DWG).
- A full range of reducer, clutch and brake options, as well as output overloads, is available.
- A wide range of further number of stops, index angles, and motion laws including oscillating movements is available.
- All rights reserved for technical changes.