


Center in
shafts M10x22

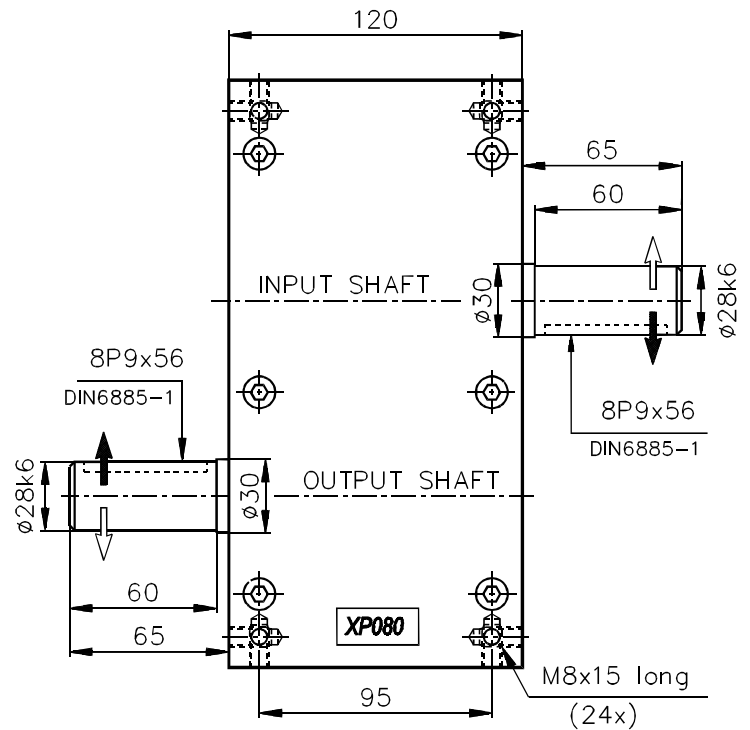

General tolerances
as per ISO 2768-m

Standard Indexer						
Number of stops n	Index angle α [°] from - to	Law of motion	Output torque at indexes/min [Nm]			Followers at pitch radius [mm]
			50	100	200	
1	300	mS 50	115	93	74	30
	330	mS 30	115	93	75	30
2	150	mS 50	116	93	73	27
	180-210	mS 30	129	104	84	30
	240-300	mS 0	121	99	80	30
3	120	mS 30	144	128	102	27
	150	mS 0	171	148	119	30
	180-300	mS 0	149	121	98	30
4	90	mS 0	126	125	103	27
	120-180	mS 0	135	126	102	30
	210-300	mS 0	130	109	88	30
5	120-180	mS 0	152	152	129	36
	210-300	mS 0	145	136	111	36
6*	150	mS 0	144	144	123	27
	180	mS 0	164	164	137	30
	210-300	mS 0	158	158	106	30
8*	120	mS 0	117	117	115	27
	150-180	mS 0	132	132	123	30
	210-300	mS 0	127	127	106	30
10*	150-180	mS 0	147	147	147	36
	210-300	mS 0	141	141	132	36

- Standard followers - \varnothing 25 mm.
- Housing made out of aluminium, weight approx. 16 kg.
- Internal moment of inertia 0,003 kgm².
- Torque during dwell approx. 20 % higher than permissible torque at 50 indexes/min.
- Keyways on input and output shafts positioned in the middle of a dwell.
- Keyways to DIN 6885/1.
- Reversibility of rotation possible.
- Long life lubrication.
- * Indexer with 6, 8 or 10 stops requires 2 revolutions per input shaft rotation.
- Drawings with detailed dimensions available on CAD (DXF, DWG).
- A full range of reducer, clutch and brake options, as well as output overloads, is available.
- A wide range of further number of stops, index angles, and motion laws including oscillating movements is available.
- All rights reserved for technical changes.