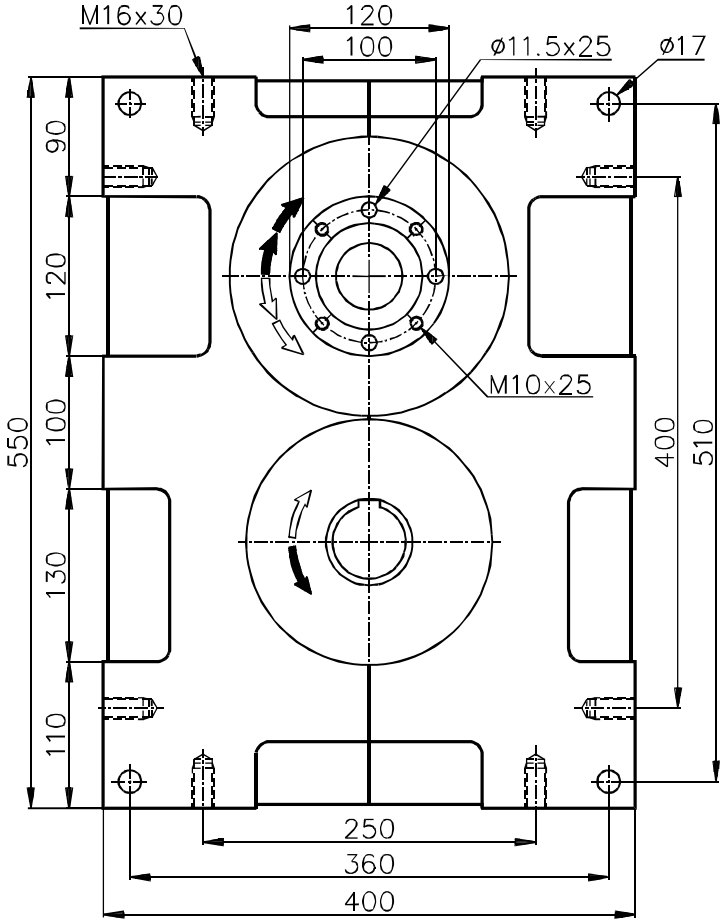

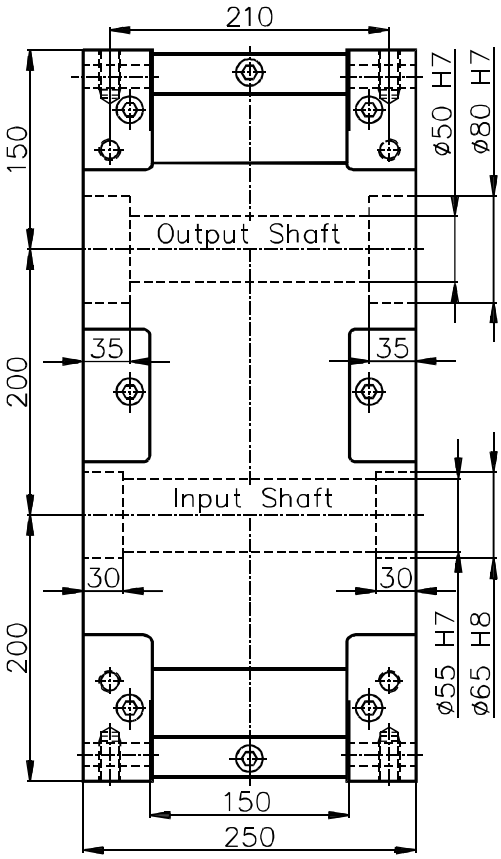

Standard Indexer						
Number of stops n	Index angle α [°] from - to	Law of motion	Output torque at indexes/min [Nm] 50	100	200	Followers at pitch radius [mm]
1	300	mS 50	1245	987	706	76
	330	mS 30	1250	1000	748	76
2	165	mS 50	1454	1141	768	76
	180-210	mS 30	1400	1117	829	76
	240-300	mS 0	1322	1066	832	76
3	135-150	mS 30	1850	1524	1134	76
	180-210	mS 0	1796	1447	1131	76
	240-300	mS 0	1621	1311	1043	76
4	105	mS 30	1550	1504	1064	76
	120-180	mS 0	1528	1366	1064	76
	210-300	mS 0	1460	1182	943	76
5	120-180	mS 0	1676	1665	1322	90
	210-300	mS 0	1603	1450	1160	90
6*	180-210	mS 0	1827	1758	1405	76
	240-300	mS 0	1777	1583	1275	76
8*	150-210	mS 0	1470	1466	1263	76
	240-300	mS 0	1429	1418	1143	76

- Standard followers - Ø 62 mm.
- Housing made of cast iron, weight approx. 220 kg.
- Internal moment of inertia 0,15 kgm^2.
- Torque during dwell approx. 20 % higher than permissible torque at 50 indexes/mi
- Keyways on input and output shafts positioned in the middle of a dwell.
- Keyways to DIN 6885/1.
- Reversibility of rotation possibile.
- Long life lubrication.
- * Indexer with 6 or 8 stops requires 2 revolutions per input shaft rotation.
- Drawings with detailed dimensions availa ble on CAD (DXF, DWG).
- A full range of reducer, clutch and brake options, as well as output overloads, is available.
- A wide range of further number of stops, index angles, and motion laws including oscillating movements is available.
- All rights reserved for technical changes.